

# ProxPro® Reader

125 kHz Proximity

125 kHz Versatile Proximity Card Reader  
5355 (Wiegand), 5352 (Serial), 5358 (Clock-and-Data)



**ACCESS** reliability.

## Application

The ProxPro proximity card reader's weatherproof design and architecturally attractive enclosure allows easy mounting indoors or out. The ProxPro Reader is ideal for applications requiring a larger read range.

## Features

- ▮ Affords high reliability, consistent read range characteristics, and low power consumption in a single, easy-to-install package.
- ▮ Features multicolor LED, internal or host control of the LED, and/or beeper and a beeper "off" switch for silent operation.
- ▮ Provides Wiegand protocol interface compatibility with all standard access control systems.
- ▮ Offers an optional, fully integrated personal identification number keypad for heightened security.
- ▮ Can be mounted to glass (using the optional glass mounting kit).
- ▮ For a longer read range, try the new generation ProxPro II Reader, which provides an additional inch (2.5 cm) of read range, requires just 5 volts for operation, and is lower-priced than the ProxPro Reader!

## Features

## Specifications

### Mounting

Mounting holes fit standard U.S.A. single-gang switch boxes (vertically mounted) to simplify installation. Field adjustable for mounting directly to metal, exhibiting only minimal effects on read range. A selectable jumper setting provides for improved performance.

### Audiovisual Indication

When a proximity card is presented to the reader, the red LED flashes green and the beeper sounds. The multicolor LED and beeper can also be controlled individually by the host system.

### Diagnostics

On reader power-up, an internal self-test routine checks and verifies the setup configuration, determines the internal or external control of the LED and beeper, and initializes the reader's operation. An additional external loop-back test allows the reader outputs and inputs to be verified without the use of additional test equipment.

### Indoor/outdoor Design

Sealed in a rugged, weatherized polycarbonate enclosure designed to withstand harsh environments, providing reliable performance and a high degree of vandal resistance. Easily installed in any location, even with the optional keypad.

### Easily Interfaced

Interfaces with all existing Wiegand protocol access control systems. Output data in Wiegand or Clock-and-Data format, plus optional RS232 and RS422 serial interfaces.

### Security

Includes a tamper switch to provide notification of reader tampering. Recognizes card formats up to 84 bits, with over 137 billion unique codes.  
\*Except Model 5352 which supports up to 37-bit formats.

### Keypad Option

Available with an optional, integrated weatherized keypad, which provides an additional level of security by allowing the use of a personal identification number (PIN). The keypad interfaces with the host system either by sending the keypad data over the data output lines, or via a direct connection to the host keypad interface.

### Warranty

Warranted against defects in materials and workmanship for life from date of shipment. (See complete warranty policy for details.)

### Part Numbers

Base Part No.: 5355 Wiegand Interface/Clock-and-Data (configurable)  
Description: Wiegand interface, tri-state LED, internal beeper on  
Options:

- Color (gray or beige)
- Keypad operation • LED and beeper operation
- Custom label

Glass Mount Kit: 5455AGM00

Base Part No.: 5352 Serial Interface  
Description: RS-232 or RS-422 Serial interface (configurable), tri-state LED, internal beeper on.

- Options:
- Color (gray or beige)
  - Keypad operation
  - Custom label

Glass Mount Kit: 5455AGM00

### Typical Maximum\* Read Range

ProxCard® II card - up to 8" (20 cm)  
ISOProx® II card - up to 7" (17.5 cm)  
DuoProx® II card - up to 7" (17.5 cm)  
Smart ISOProx® II card - up to 7" (17.5 cm)  
Smart DuoProx® II card - up to 7" (17.5 cm)  
HID Proximity & MIFARE® card - up to 7" (17.5 cm)  
ProxCard® Plus card - up to 3" (7.5 cm)  
ProxKey® II keyfob - up to 3" (7.5 cm)  
MicroProx® Tag - up to 4" (10.2 cm)  
ProxPass® Active Vehicle Tag - N/A

\*Depending on local installation conditions.

**Dimensions:** 5.0" x 5.0" x 1.0" (12.7 x 12.7 x 2.54 cm)

**Material:** Polycarbonate UL 94

**Power supply:** 10-28.5 VDC; Linear power supplies recommended. Reverse voltage protection included.

**Current requirements:** Average: 100 mA (12 VDC)  
Peak: 120 mA (24 VDC)

**Operating temperature:** -22° to 150° F (-30° to 65° C)

**Operating humidity:** 0-95% relative humidity non-condensing

**Weight:** 12 oz. (336 gm)

**Transmit frequency:** 125 kHz

**Excite frequency:** 125 kHz


### Cable distance:

Wiegand or Clock-and-Data interface: 500 feet (152 m)  
RS-232 interface: 50 feet (15 m)  
RS-422 interface: 4000 feet (1219 m)  
Recommended cable is ALPHA 1295 (22 AWG) 5 conductor stranded with overall shield or equivalent. Additional conductors may be required for LED or beeper control. RS-422 requires ALPHA 6212C 2-Twisted Pair, shielded cable with drain wire, or equivalent for data, plus ALPHA 1292C two-conductor shielded or equivalent for DC power.

**Environmental:** IP55

### Certifications:

UL294/cUL (US), FCC Certification (US), IC (Canada), CE (EU), C-tick (Australia, New Zealand), SRRC (China), MIC (Korea), NCC (Taiwan), MIC (Japan), iDA (Singapore), RoHS

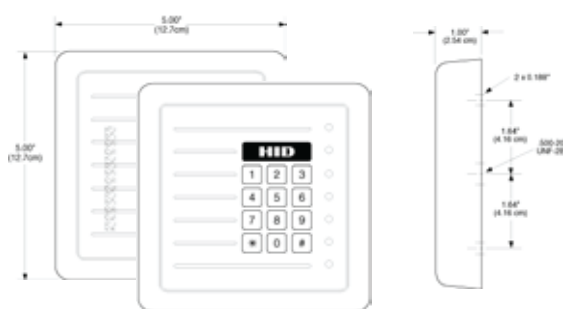

© 2009 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 05/2009

MKT-PROXPRO\_DS\_EN



For best results, please print on recycled paper.

**ACCESS experience.**

**hidglobal.com**

### HID Global Offices:

**Corporate North America**  
15370 Barranca Pkwy  
Irvine, CA 92618  
U.S.A.  
Phone: (800) 237-7769  
Phone: +1 (949) 732-2000  
Fax: +1 (949) 732-2360

**Asia Pacific**  
19/F 625 King's Road  
North Point  
Island East  
Hong Kong  
Phone: +852 3160-9800  
Fax: +852 3160-4809

**Latin America**  
Circunvalacion Ote. #201 B  
Despacho 2  
Col. Jardines del Moral  
Leon 37160, Gto.  
Mexico  
Phone: +52 477 779 1492  
Fax: +52 477 779 1493

**Europe, Middle East & Africa**  
Phoenix Road  
Haverhill, Suffolk  
CB9 7AE  
England  
Phone: +44 (0) 1440 714 850  
Fax: +44 (0) 1440 714 840

