




ICD-7532CK

1/3" Indoor Varifocal Dome Camera

SPECIFICATIONS

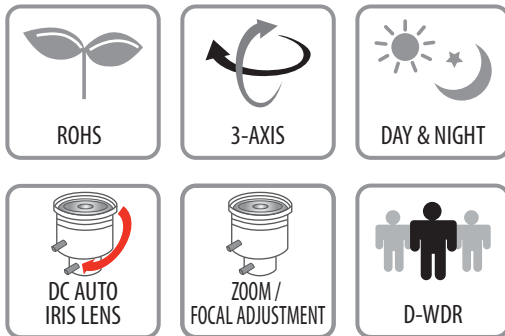

FEATURES

- High Resolution of 630TV Lines (Color) & 680TV Lines Monochrome (B/W)
- Min. illumination of 0 Lux (LED on) for Infrared Lighting Conditions
- Built in 2.8-11mm Varifocal Lens with auto iris
- Built in 24 standard IR LEDs for 20m IR Range
- IR Smart Control
- 3D Digital Noise Reduction for noise filtering
- Digital Wide Dynamic Range to filter intense backlight surrounding an object
- Digital Day & Night function is to adjust the video image to b/w in low light condition
- Built in simple OSD & 3-Axis Gimbal Bracket
- ATW is a color compensation tool to reflect the original color of an object

ITEM		NTSC	PAL
Total Pixels		811(H) x 508(V)	795(H) x 596(V)
Effective Pixels		768(H) x 494(V)	752(H) x 582(V)
Sensor		1/3" High Resolution CCD	
Scanning System		2:1 Interlace	
Frequency		Horizontal :15.734KHz Vertical : 59.94Hz	Horizontal :15.625KHz Vertical : 50.00Hz
Electrical	Resolution	630 TV Lines (Color)/680 TV Lines (BW)	
	Video Output	1.0Vp-p Composite Signal (75ohm)	
	AGC	OFF / LOW / MIDDLE / HIGH	
	S/N (Y signal)	52dB or more (AGC OFF)	
	Min.Illumination	0.01 Lux (Color) and 0 Lux (LED on)	
	White Balance	MANUAL / PUSH / AWC	
	Electronic shutter speed	1/60s - 1/100,000s	1/50s - 1/100,000s
	3D-DNR	OFF / ON Selectable(LOW / MIDDLE / HIGH / CNR)	
	Sens-Up	OFF / AUTO(x2 ~ x1024)	
	D&N Selection	AUTO / COLOR / BW / EXT	
	BLC	ON / OFF Selectable	
	D-WDR	ON / OFF Selectable	
	HLM	ON / OFF Selectable	
	Defect Pixel Compensation	Built In OSD	
	IR SMART	ON / OFF Selectable	
	Motion Detection	OFF / ON(AREA 1~4)	
	Privacy Masking	OFF / ON(MASK 1~8)	
	Mirror	ON / OFF Selectable	
	Sharpness	ON / OFF (Level Adjustable 1~50)	
	Multi Language	Available	
O.S.D	Available		
IR LED'S		24 IR LEDs	
IR Range		20 Meters	
Lens Mount		2.8~11mm DC Auto Iris	
Operating temperature/Humidity		-10°C~+50°C / 0~80% RH	
Power Supply		DC12V 100mA (CDS ON : 370mA Max)	
Dimensions		112(W)mm X 87(D)mm	
Weight		Approx. 200g	

* The specifications are subject to change without notice ** Remarks: NTSC available upon request