IAHD-V2020XT

2 MP Water-proof Dome Camera

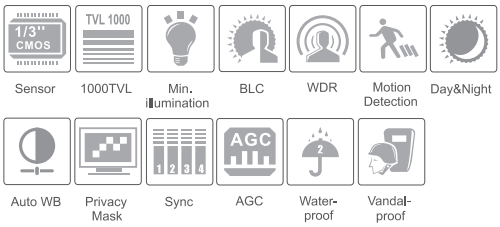

Features

- 1080P real time image, high resolution, true color
- AHD lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- Support motion alarm
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 20 ~ 30m IR night view distance optional
- IP66 & IK10 ingress protection

Dimensions

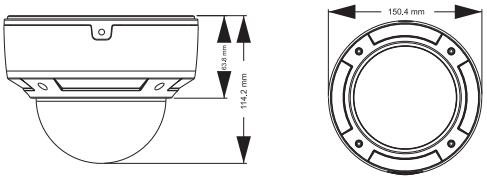

Specifications

Specifications / Model	IAHD-V2020XT
Camera	
Image Sensor	1 / 3 "CMOS
Resolution	1920 x 1080
Image System	PAL / NTSC
Min. Illumination	0 Lux (LED ON)
Lens	2.8 ~ 12 mm FOV; 30~98 Degrees
IR Distance	20 ~ 30m optional
Water-proof	IP66
Video Output	BNC x 1
Image Size	1080P (1920 x 1080)
Frame Rate	30 fps (60 Hz), 25 fps (50 Hz)
Functions	
Screen Display	12 languages supported
Function Control	OSD
Day&Night	Yes (ICR)
BLC & HLC	Yes
Defog	Yes
WDR	Yes
3D NR	Yes
Motion Detection	Up to 4 areas
Privacy Mask	Up to 8 areas
Defect Correction	Yes (support live and static defective pixel correction)
S / N Ratio	> 52 dB (AGC off)
Electronic Shutter	1 / 50s ~ 1 / 50000s (PAL); 1 / 60s ~ 1 / 50000s (NTSC)
AGC	Yes
White Balance	ATW, AWC→SET, Indoor, Outdoor, Manual
Advanced Image	Sharpness, saturation, brightness, etc. are adjustable
Mirror	Yes
Smart IR	Yes
Others	
Power Supply	DC 12V (± 10 %)
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)	Φ150 x 114
Weight (net)	907g